

# TRUFLEX Waste water technology

## Discharge / Connection HT-System hoses

The TRUFLEX-Discharge / Connection hose HT-System was designed as a simple, fast and economic alternative, as a water-discharge connection between the odour-seal and the HT-Wall/Floor connection to the sink, the shower and the bath.

This winded hose is welded on one side with an HT-Socket i.d. 50 mm the other side has a welded on stepped socket o.d. 40 mm alternative o.d.50 mm.

A heat temperature stable hose with a flammable resistant finish.

This hose has a smooth interior so that the dirt can not remain or deposit on the inside. Should bending occur, because of it's high radial strength the diameter will not deform and the liquid flow will not get cut off or blocked.


When installing into the wall a gradient of 3° should be left to allow for correct drainage.

Produced following DIN 4102-1 for domestic discharge lines.


Standard length:  
250 mm, 500 mm, 750 mm and 1000 mm.

Colour: grey RAL 7037

Temperature resistant: up to 100°C briefly

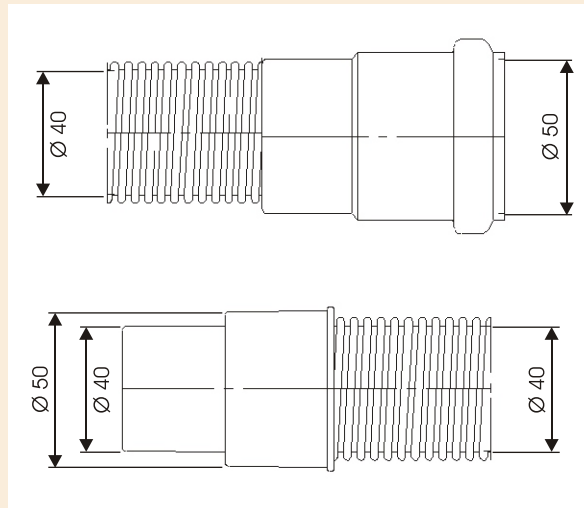

*The flexible Solution*

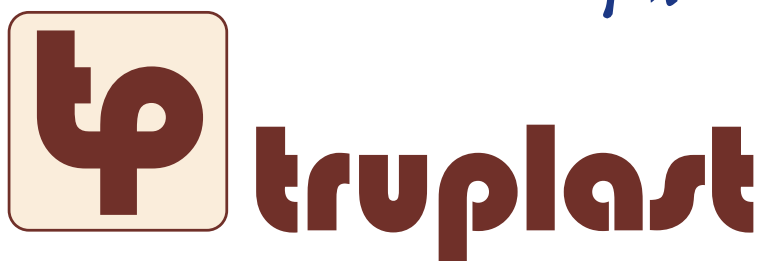

Kunststofftechnik GmbH  
Am Wingert 1-3  
D-35428 Langgöns

Telefon (0 64 03) 916-0  
Telefax (0 64 03) 916-200  
e-mail: info@truplast.com

www.truplast.de  
www.truplast.com